


CSP 305 A / B

Conduction-cooled capacitor



Technology Patented Worldwide

CSP 305 A

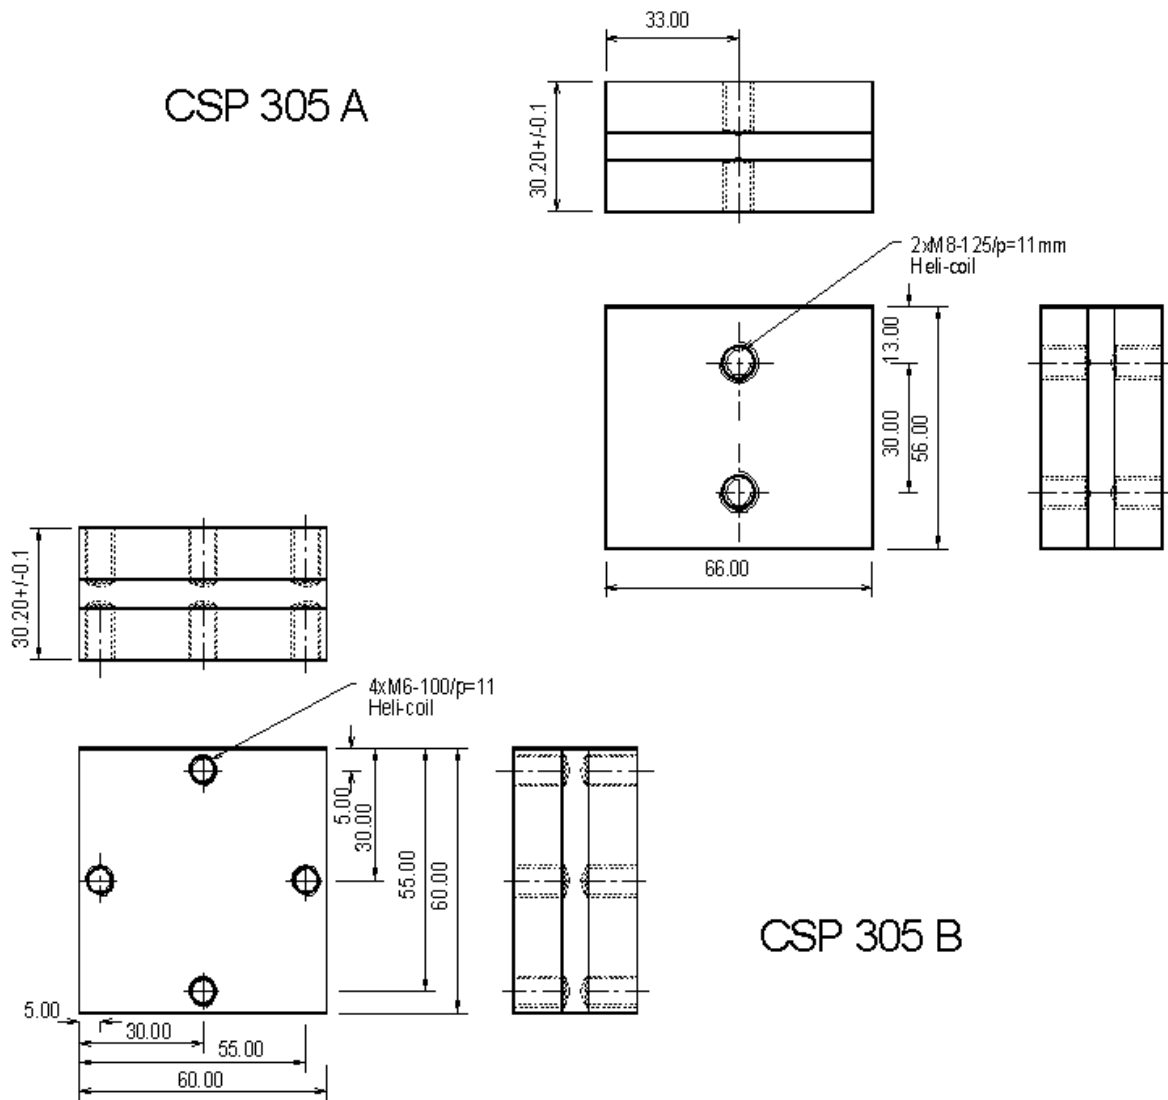

Specifications


TYPE		CSP 305 A / B							
Dimensions (L x W x H)	mm	A: 66 x 56 x 30.2 B: 60 x 60 x 30.2							
Weight	kg	0.6							
Capacitance (±10%)	μF	0.1	0.2	0.34	0.68	1	1.3	2.7	4.8
Sinusoidal Voltage	V _{rms}	1000		700		600		500	400
Peak Voltage	Ŷ	1410		990		850		710	570
Max. Current	A	375		500		650		675	750
Max. Power	kVA _r	300							
Freq Range @ Full Power	kHz	477-700	239-373	287-390	143-195	133-224	102-172	71-90	62-62
Stray Inductance	nH	< 5							

CSP 305 A / B


Conduction-cooled capacitor




Technology Patented Worldwide

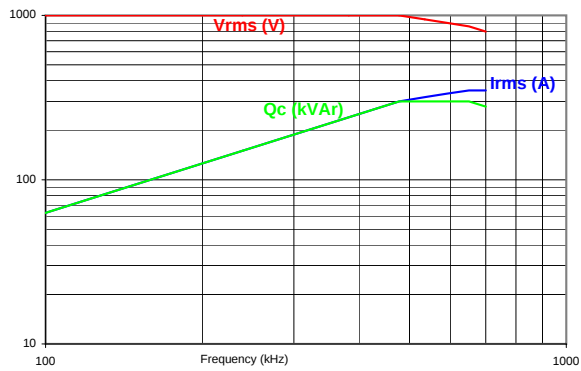


CSP305A/B 0.1µF - 1000 Vrms - 350 Arms - 300 kVAr

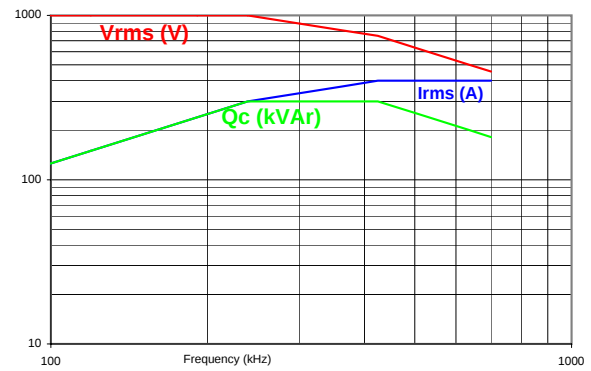


CSP305A/B 0.2µF - 1000 Vrms - 400 Arms - 300 kVAr

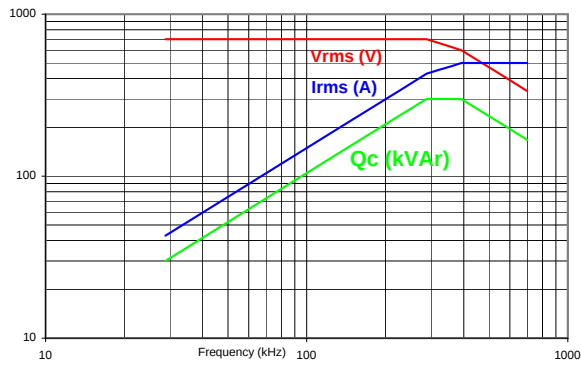


CSP305A/B 0.339µF - 700 Vrms - 500 Arms - 300 kVAr

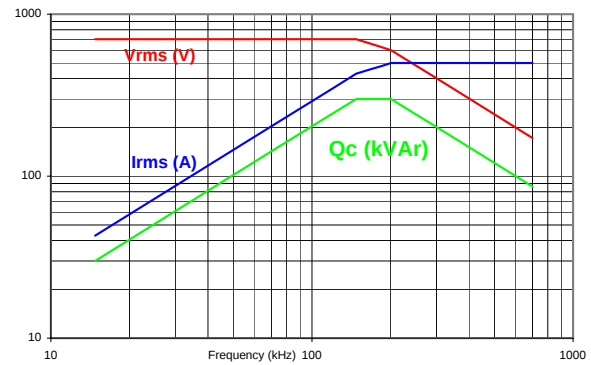


CSP305A/B 0.66µF - 700 Vrms - 500 Arms - 300 kVAr

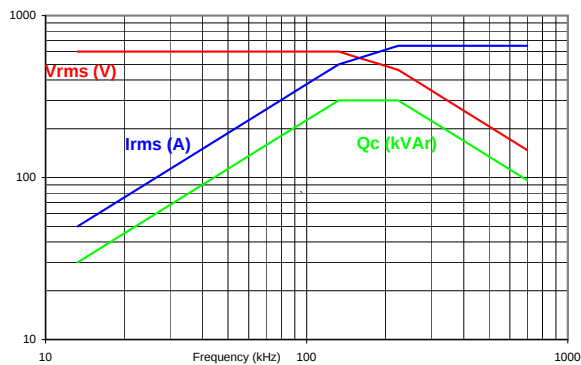


CSP305A/B 1µF - 600 Vrms - 650 Arms - 300 kVAr

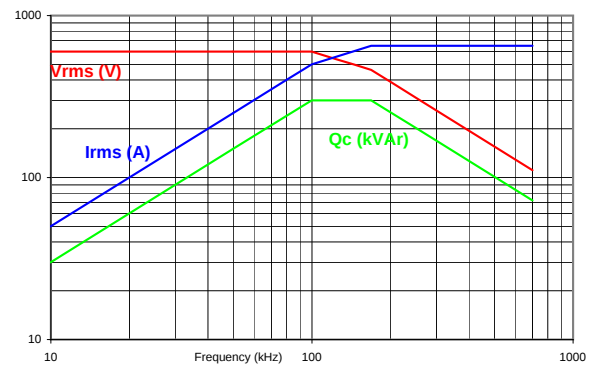

CSP305A/B 1.33µF - 600 Vrms - 650 Arms - 300 kVAr

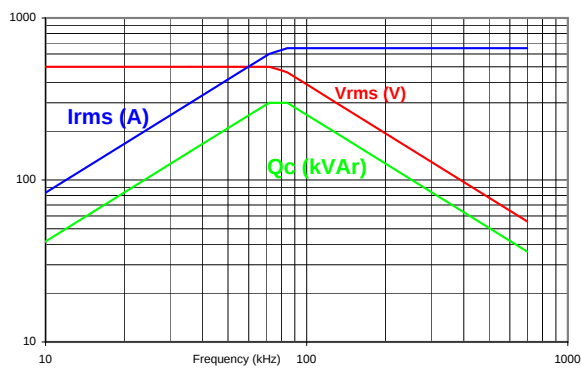

CSP305A/B 2.66µF - 500 Vrms - 650 Arms - 300 kVAr

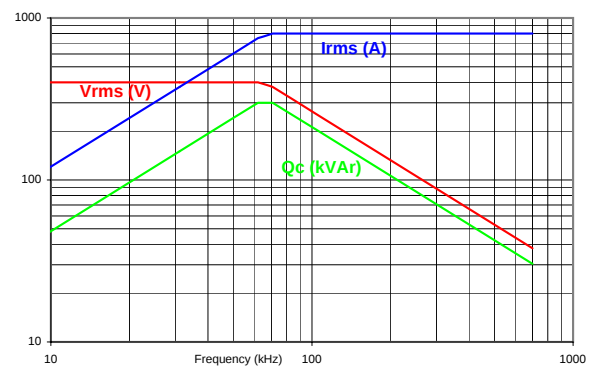

CSP305A/B 4.8µF - 400 Vrms - 800 Arms - 300 kVAr

Celem Power Capacitors

Produced: 11/4/2006